


Type SPR-EDU-AS

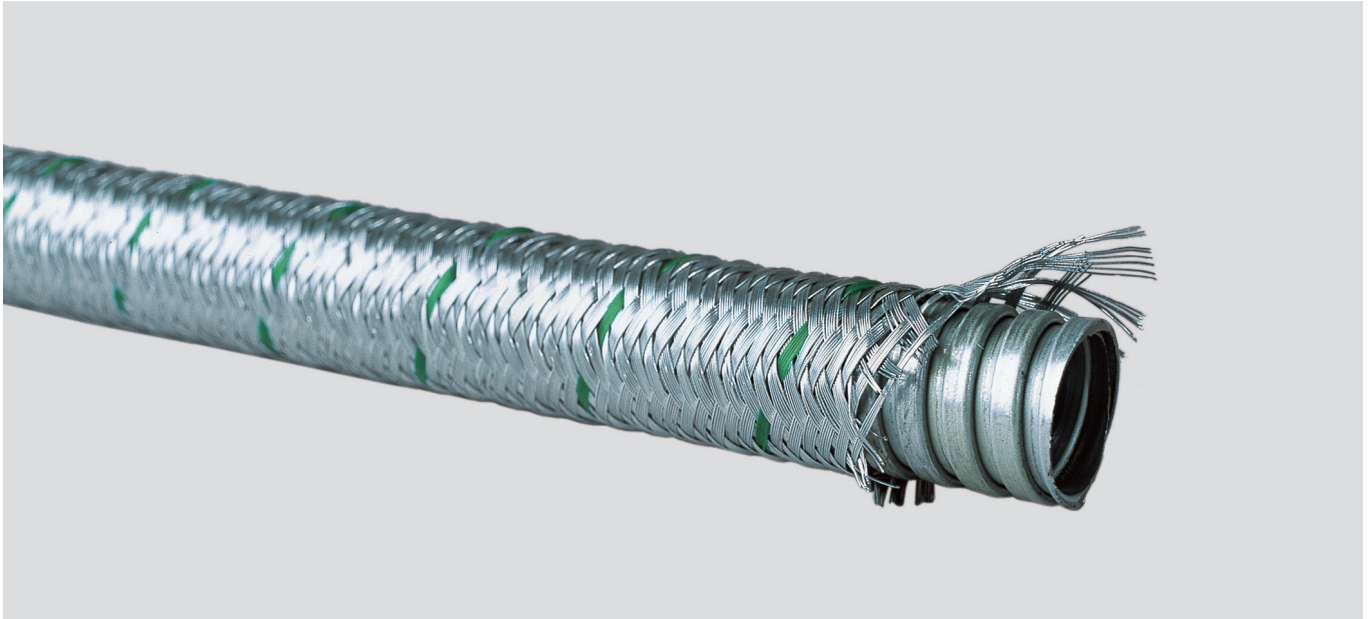

Type SPR-EDU-AS

Spiral wound metallic tube with latched profile and steel wire braiding.
High tensile and transverse pressure load rating.

Application

- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

Material

Cold rolled strip St 2 acc. to DIN 1624, galvanised, Fe/Zn 3

With steel wire braiding

Note

Suitable connection glands:
US, LI

Technical Data

Protection classification : IP 40

Temperature range: up to +220°C

| Part No. | Size PG | Size metric | Inner Ø mm | Outer Ø mm | Per metres | net EUR/100 metres at acceptance of | | |
|----------|---------|-------------|------------|------------|------------|-------------------------------------|-----------|------------|
| | | | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 97584 | - | - | 8,0 | 10,0 | 50 | o. r. | o. r. | o. r. |
| 97585 | - | - | 11,0 | 14,0 | 50 | o. r. | o. r. | o. r. |
| 97586 | - | - | 14,0 | 17,0 | 50 | o. r. | o. r. | o. r. |
| 97510 | - | - | 16,0 | 19,0 | 50 | o. r. | o. r. | o. r. |
| 97377 | - | - | 18,0 | 21,0 | 50 | o. r. | o. r. | o. r. |
| 97378 | - | - | 23,0 | 27,0 | 50 | o. r. | o. r. | o. r. |
| 97379 | - | - | 31,0 | 36,0 | 25 | o. r. | o. r. | o. r. |
| 96784 | - | - | 40,0 | 45,0 | 25 | o. r. | o. r. | o. r. |
| 97587 | - | - | 51,0 | 56,0 | 25 | o. r. | o. r. | o. r. |

small pack

| Part No. | Size PG | Size metric | Inner Ø mm | Outer Ø mm | Per metres | net EUR/100 metres at acceptance of | | |
|----------|---------|-------------|------------|------------|------------|-------------------------------------|-----------|------------|
| | | | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 94920 | - | - | 8,0 | 10,0 | 10 | o. r. | o. r. | o. r. |
| 94921 | - | - | 11,0 | 14,0 | 10 | o. r. | o. r. | o. r. |
| 94922 | - | - | 14,0 | 17,0 | 10 | o. r. | o. r. | o. r. |
| 94923 | - | - | 16,0 | 19,0 | 10 | o. r. | o. r. | o. r. |
| 94924 | - | - | 18,0 | 21,0 | 10 | o. r. | o. r. | o. r. |
| 94925 | - | - | 23,0 | 27,0 | 10 | o. r. | o. r. | o. r. |
| 94926 | - | - | 31,0 | 36,0 | 10 | o. r. | o. r. | o. r. |
| 94927 | - | - | 40,0 | 45,0 | 10 | o. r. | o. r. | o. r. |
| 94928 | - | - | 50,0 | 56,0 | 10 | o. r. | o. r. | o. r. |

o. r. = on request